


TerraLUX® TLE-300 LED Upgrade/Bulb Replacement for Mag Instruments®* D-Cell Flashlights

Instructions

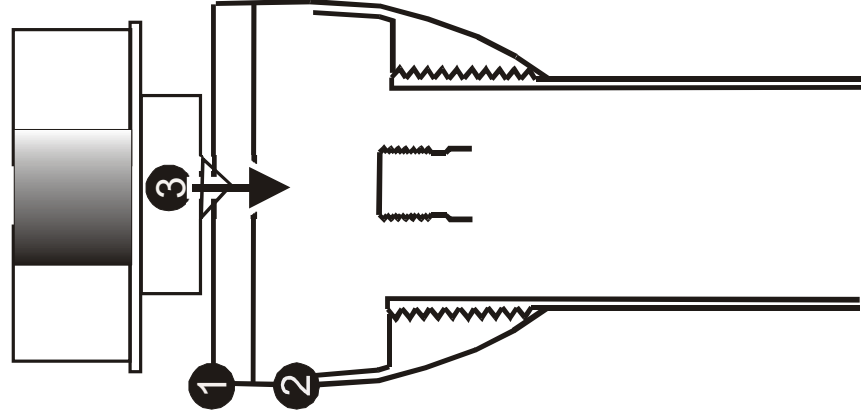

Step 1. Remove the front bezel of the flashlight containing the plastic lens by turning counter-clockwise and set aside. Remove the reflector and the incandescent bulb. You will not need the reflector, bulb or its retaining ring, but may wish to keep them for future use.

Step 2. Screw the head of the flashlight down by rotating it clock-wise, stopping when the flashlight head is all the way down at the end of its travel.

Step 3. Screw the TLE-300 into the open bulb socket by turning clock-wise. Screw the unit down until you feel resistance. **DO NOT OVERTIGHTEN!** Next, raise the head by turn the head counter-clockwise until you feel it hit the underside of the TLE-300. The TLE-300 may turn a slightly indicating it has made contact. Replace the front bezel and lens.

*Disclaimer: Terralux is not affiliated with Mag Instruments which owns its trademark and copyrighted designs. Mag Instruments trademark(s) are used here only to identify the flashlight that the TerraLUX LED light bulb replacement is intended to work in. TerraLUX products are not endorsed by Mag Instruments. Using TerraLUX products in a Mag Instruments flashlight may void the warranty.